


**APPENDIX A
FLOW CHART FOR SERVICE LIFE CONTROL**

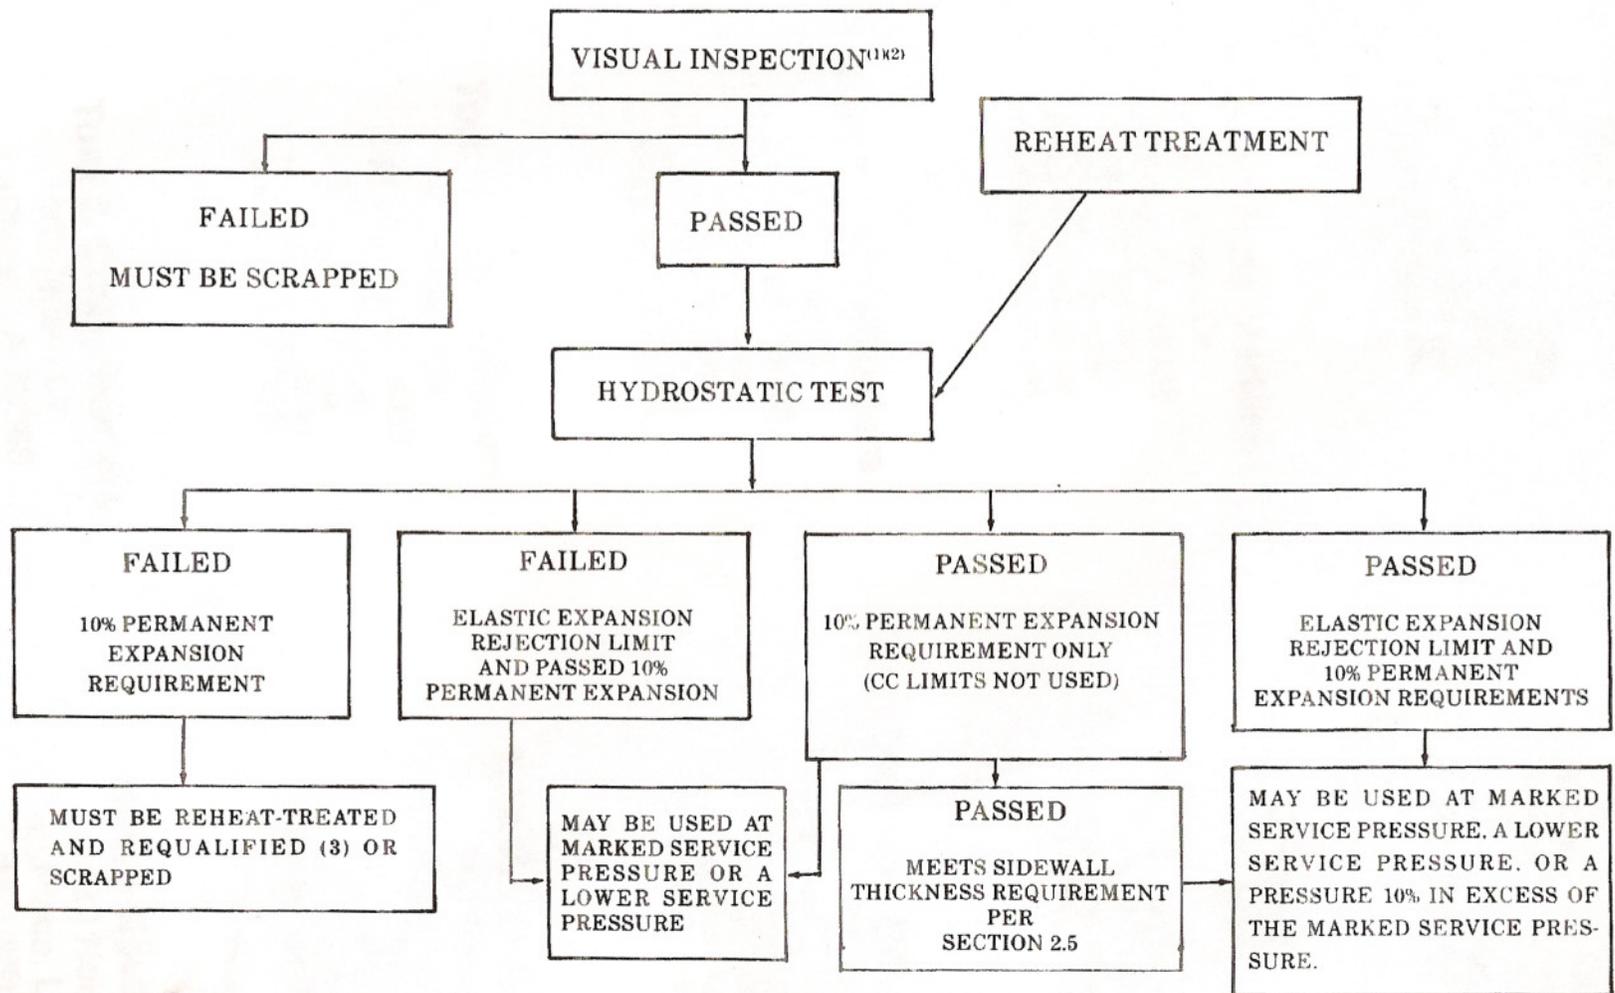

- (1) Visual inspection must be conducted in accordance with Compressed Gas Association Pamphlet C-6.
- (2) May be conducted after the hydrostatic test depending on the existing shop practice.
- (3) Reheat-treated cylinders must be requalified in accordance with 49CFR173.34.