


# MK 19 AF

## Balanced Diaphragm

### First Stage Regulator

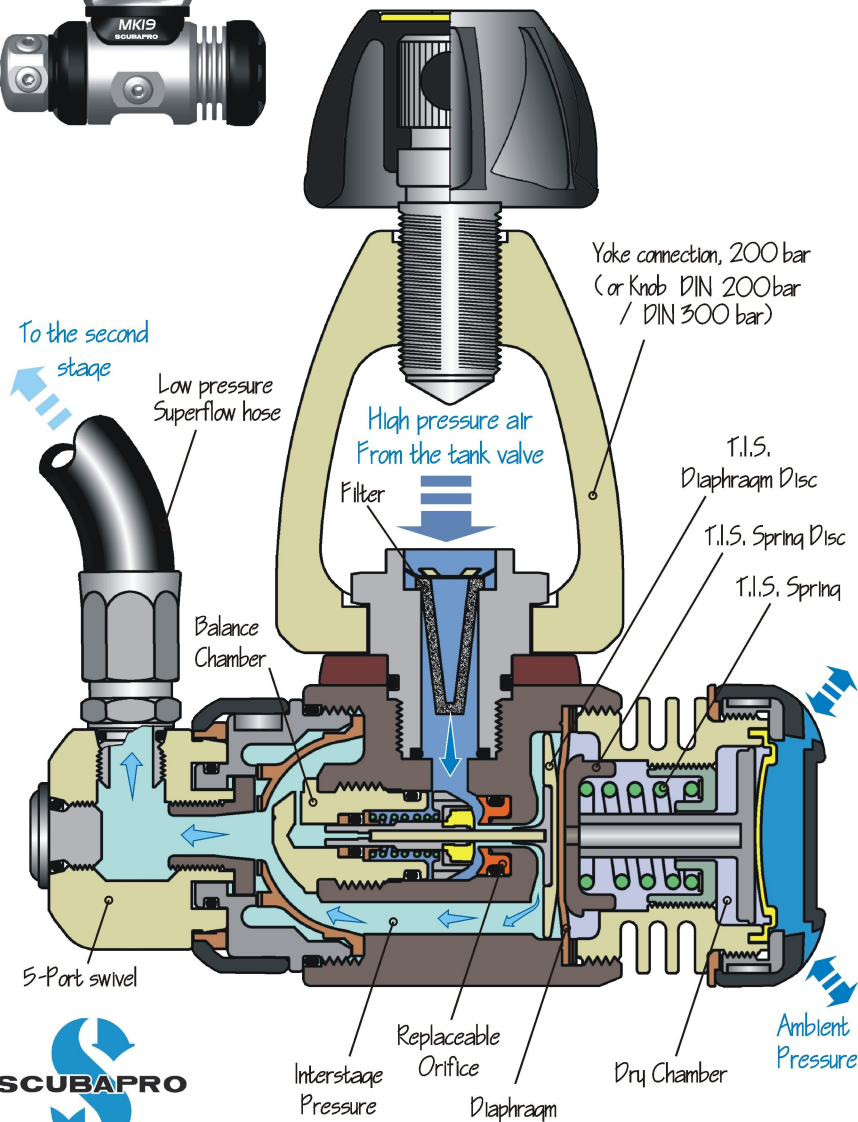

4350 psi (300 bar) Max  
Working Pressure

Intermediate Pressure  
Inversion

Dry Chamber

2 HFP High Flow LP Ports

5 LP Port 360° Swivel

#### MK 19 AF FIRST STAGE SPECIFICATIONS

##### Materials

Body Brass, Satin Chrome Finish

Yoke Forged Brass

Co-molded HP poppet  
Brass / High-Tensile Technopolymer

Orifice AISI 316 Stainless Steel

Spring Stainless Steel, T.I.S. Coated

Number of High Pressure Ports..... Two

Number of Low Pressure Ports..... Five

Weight (INT)..... 35.9 ounces (1017 grams)

Weight (DIN200)..... 27 ounces (766 grams)

HP Valve Design..... Conical

Protection Cap..... Elastomer, DIN/Standard

Intermediate pressure 130-142 psi (9-9.8-bar)

Flow at 3000 psi (206 bars)..... 230 SCFM  
(6500 litres per minute)